



PREMIUM RANGE

Dishwashers

PREMIUM RANGE

Dishwashing machines specifically designed and incorporating the latest technology to meet the rigorous demands of all UK catering outlets

*Heavy duty • Reliable • Hygienic • Cost effective
Easily maintained • Economical*



DC 500 Dishwasher

DC 600 Dishwasher

Specifications	DC 500	DC 600
Height mm	780	840
Depth mm	535	575
Width mm	500	555
Baskets mm	3x400x400	3x450x450
Loading height max mm	275	345
Cycle minutes	2-3	2-3
Wash tank capacity lts	10.0	11.0
Rinse tank capacity lts	7.0	7.0
Water consumption per cycle lts	2.2	2.5
Rinse tank element watts	2600	4500
Wash tank element watts	1600	2000
Pump motor watts	300	580
Total loading watts	2900	5080
Power supply 240v	13A	25A or 3P+N
Wash tank temperature °c	55	55
Rinse tank temperature °c	80 (or as req'd)	80 (or as req'd)
Waste height max mm	160	80
Waste pump (option)	✓	✓
Waste outlet hose Ø	25	25
WRAS approved - category 4	Break tank	Break tank
Rinse booster pump watts	210	210

DC 500A


DC 600A

PREMIUM RANGE

- 35 years experience in the design, manufacture and distribution of dishwashing systems
- Constructed of catering grade 18/8 AISI stainless steel, non-corrosive materials, correctly rated components and tough electro-mechanical controls - no expensive circuit boards
- Double skinned door and outer panels for additional strength and reduced noise levels
- Powerful anti-clog wash arms and contra-rotating light weight rinse arms for optimum results
- Moulded wash tank with integral basket slides - eliminating dirt traps
- Specially designed insulated low volume wash tank requires up to half as much water as conventional machines and therefore consumes less water, less power and less detergent for maximum savings
- Spares at competitive prices reduce repair costs and prolong the viability of your machine
- Double filter system ensures full protection and reduced maintenance time
- WRAS approved break tank complete with rinse booster pump to category 4
- Integral peristaltic detergent and rinseaid pumps for precise dosing
- Options - factory fitted waste pump and integral rinse booster pump



DC 700 Dishwasher



DC 800 Dishwasher




Specifications	DC 700	DC 800
Height mm	845	1200
Depth mm	605	605
Width mm	600	600
Baskets mm	3x500x500	3x500x500
Loading height max mm	345	345
Cycle minutes	2-3	2-3
Wash tank capacity lts	12.0	12.0
Rinse tank capacity lts	7.0	7.0
Water consumption per cycle lts	2.5	2.5
Rinse tank element watts	4500	4500
Wash tank element watts	2000	2000
Pump motor watts	580	580
Total loading watts	5080	5080
Power supply 240v	25A or 3P+N	25A or 3P+N
Wash tank temperature °c	55	55
Rinse tank temperature °c	80 (or as req'd)	80 (or as req'd)
Waste height max mm	80	380
Waste pump (option)	✓	✓
Waste outlet hose Ø	25	25
WRAS approved - category 4	Break tank	Break tank
Rinse booster pump watts	210	210


DC 700A

DC 800A


PREMIUM RANGE

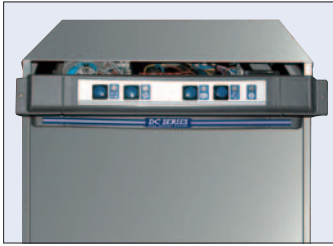

Top panel slides out for easy access to electrical components.

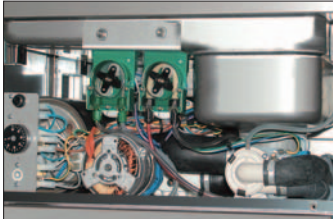

Integral detergent and rinseaid pumps - easy access to heating elements, thermostats, etc.

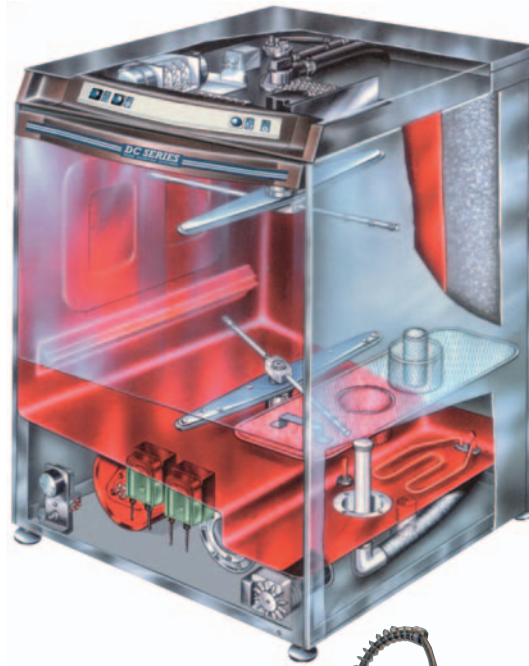

Moulded wash tank with integral basket slides - wash & rinse arms.



WRAS approved category 4 integral break tank and washtank insulation.

Wash Station



Accessories

- Water softeners
- Machine stands
- Rinse booster pumps
- Drip trays
- Dish baskets
- Glass baskets
- Racking bays

Technical

Water connection: $\frac{3}{4}$ BSP.
 Water pressure: 2-4 bar.
 Water flow rate - break tank:
 3 lts per min.
 Water softeners required where water hardness exceeds 7° Clark (English scale) - 100PPM.

Warranty: one year parts & labour.

We reserve the right to change specifications without notice



Direct Catering Products
 Northload House Northload Lane
 Theale Wedmore Somerset BS28 4SY
 Telephone: 01934 713358
 Fax: 01934 712164
www.directcateringproducts.co.uk
 E-mail: sales@directcateringproducts.co.uk



Authorised Dealer