

POT WASHERS



DC SERIES

WAREWASHING & ICEMAKING SYSTEMS



LP 57






LP 67 E




LP 109 E



LPP 109 E

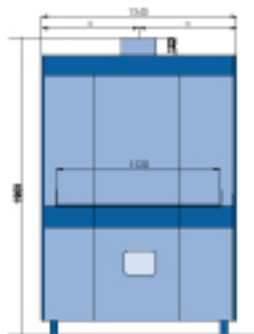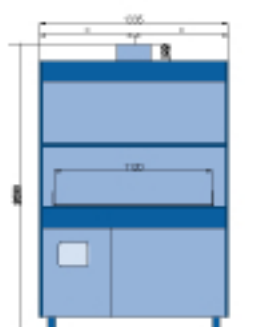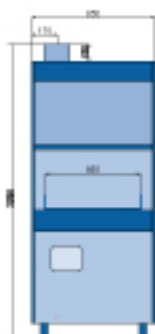

Tank capacity LT	Boiler capacity LT	Tank element kW	Boiler element kW	Wash pump kW	Rinse booster pump kW	Total power kW	Measurements mm	wash cycle line sec	Volt	Basket size mm	Clear entry height mm
LP 57 E											
35	12	3	10	1.5	0.2	11.7	600X720X1615	60/120/180 +C	400V In + N	570X570	500
LP 67 E											
60	12	6	9	3.2	0.55	18.2	850X850X2030	180/090/540 +C	400V In + N	670X670	720
LP 109 E											
100	12	6	14	2 X 2	0.55	26	1270X850X2030	180/090/540 +C	400V In + N	670X1060	720
LPP 109 E											
100	12	6	14	2 X 2	0.55	26	1340X850X1780	180/090/540 +C	400V In + N	595X1140	590

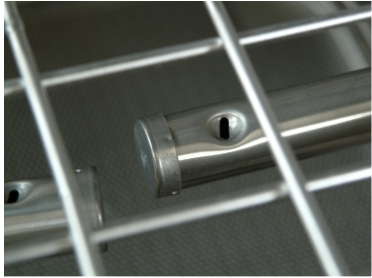

Moulded wash tank with radial corners and double filters for hygiene and easy maintenance.

Specially designed stainless steel, rotating wash and rinse arms which are easily removed for cleaning.

Stainless steel basket on wheels



ELECTRONIC CONTROL PANNEL

The electronic control panel displays wash temperature and rinse temperature during the cycles. Easy to use for the operator. Wash and rinse cycles periods can be modified by the technician.



QUALITY - RELIABILITY - PROGRESSIVE DESIGN

- Silanos, with forty years experience in the design, manufacture and distribution of commercial pot washer machine systems are one of Europe's market leaders, in this specialist field.
- Constant development has culminated in a wide range of pot washers, accessories and tabling to meet the rigorous demands of the catering industry and their operational workforce.
- The latest technology available is incorporated into our current range of machines, some of which are as follows:
 - Pressed molded wash tanks with a comprehensive filter system, for quick and easy cleaning.
 - High efficiency, self draining wash pumps for greater hygiene and ultimate washing power.
 - Insulated rinse boiler and double skinned cabinet construction reduces energy costs, noise levels and keeps the wash area ambient temperature, to an absolute minimum.
 - Panoramic doors for safe and easy access to carry out routine maintenance.
 - All electrical control impulses are rated at 24 Volts to ensure complete levels of safety.
 - Rinse booster pump to ensure consistent high rinse quality.
- Our pot washers comply with current legislation, including WRAS requirements standard.